

## FEATURES

- Compact and ergonomic design
- Tension measurements
- High accuracy regardless force application point

## S

- On-board equipment testing
- Production quality control
- Laboratory and Research

## FN2317

### HandBreak Load Cell

## SPECIFICATIONS

- Ranges 500 N and 1000N (100 and 200 lbf)
- Compatible with most handbrakes
- “Easy to mount” through clamping collars
- High accuracy  $\pm 0.5\%$  FS

The **FN2317** is designed with the purpose of allowing quick and easy installation when measuring forces applied to the handle of the hand brake in automobiles. Clamping collars facilitate the prompt and uncomplicated installation of the load cell under the hand brake. As such, the **FN2317** is compatible with most models of hand brakes.

Through careful placement of metallic strain gages inside, the sensors provides accurate measurements regardless of the point of application of force.

With many years of experience as a designer and manufacturer, TE CONNECTIVITY offers solutions to automotive industry and can supply standard or custom sensors for specific uses and testing environments.

On request, Instruction documents can be provided to ease the selection and use of our sensors and provide helpful tips.

## APP LIC ATI ON

**STANDARD RANGES**

<b>Ranges in N (FS)</b>	500	1000
<b>Ranges in lbf (FS)</b>	100	200

**PERFORMANCE SPECIFICATIONS (typical values at temperature 23±3°C)**

<b>Parameters</b>	
Operating Temperature Range (OTR)	-20 to 80° C [-4 to 176° F]
Compensated Temperature Range (CTR)	0 to 60° C [32 to 140° F]
Zero Shift in CTR	<0.5% F.S. / 50° C [100° F]
Sensitivity Shift in CTR	<1% of reading / 50° C [100° F]
<b>Over-Range</b>	
Without Damage	1.5 x F.S.
Without Destruction	3 x F.S.
<b>Accuracy</b>	
Combined non-linearity & hysteresis	≤±0.5% F.S.

**Electrical Characteristics**

<b>Model</b>	<b>FN2317</b>	<b>FN2317-A1</b>	<b>FN2317-A2</b>
Supply Outage	10Vdc	10 – 30Vdc	±15Vdc (±12 to ±18Vdc)
Sensitivity “FSO” <sup>4</sup>	±1.5mV/V	4V ±0.2V	5V ±0.2V
Zero Offset <sup>4</sup>	±5% F.S.	0.5V ±0.2V	0V ±0.2V
Input Impedance/Consumption	350 to 700Ω	<50mA	50mA
Output Impedance	350 to 700Ω	1 kΩ <sup>5</sup>	1 kΩ <sup>5</sup>
Insulation under 50Vdc	≥100MΩ	≥100MΩ	≥100MΩ



**Notes**

1. standard electrical termination: cable gland with Ø3mm shielded cable, 2meters length
2. Material: stainless steel.
3. Protection Index: IP50
4. Other signal output on request
5. Output impedance < 100Ω on request
6. CE conformance according to EN 61010-1, EN 50081-1, EN 50082-1

# FN2317


HandBreak Load Cell

## DIMENSIONS & WIRING SCHEMATIC (IN METRIC)

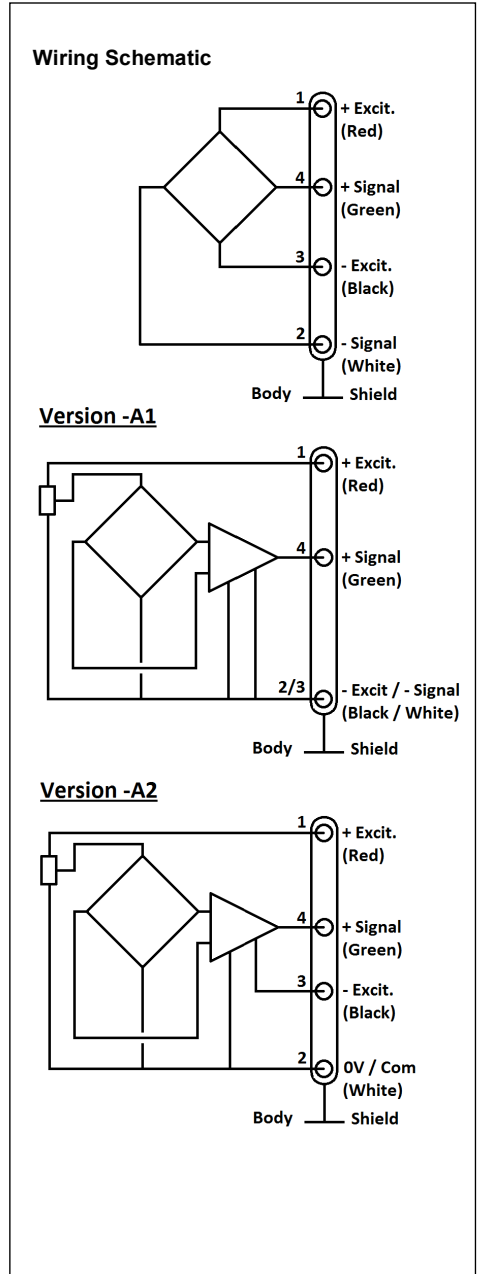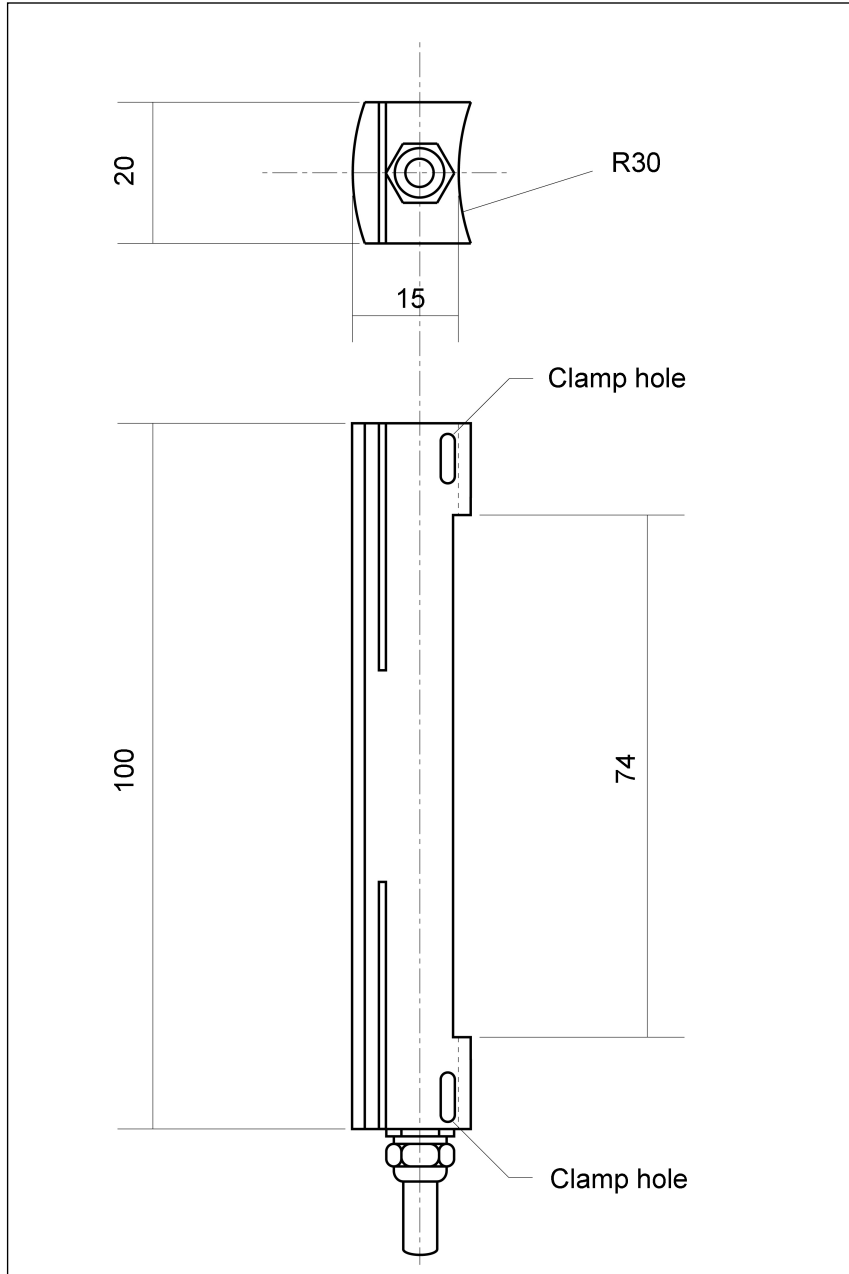

**OPTIONS**

<b>A1</b> : Amplified Tension output with unipolar power supply
<b>A2</b> : Amplified Tension output with bipolar power supply
<b>SC</b> : LEMO connector output instead of standard cable gland
<b>L00M</b> : special cable length, replace "00" with total length in meters

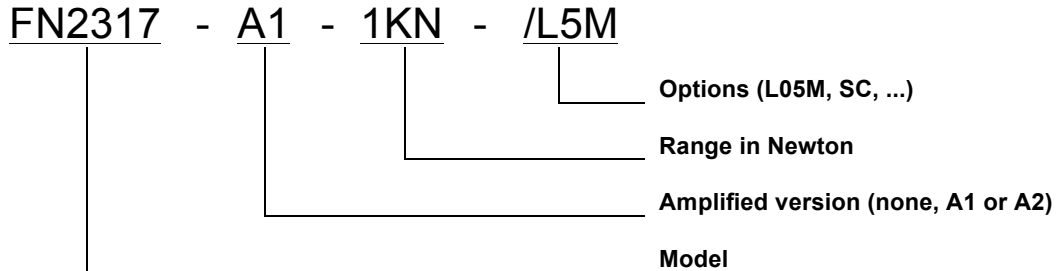**ORDERING INFORMATION****NORTH AMERICA**

Measurement Specialties, Inc.,  
 a TE Connectivity Company  
 Vibration Design Center  
 32 Journey - Suite 150  
 Aliso Viejo, CA 92656  
 United States USA  
 Tel: 1-949-716-0877  
 Fax: 1-949-916-5677  
 CustomerCare.lcsb@te.com

**EUROPE**

Measurement Specialties (Europe), Ltd.  
 a TE Connectivity Company  
 26 Rue des Dames  
 78340 Les Clayes-Sous-Bois, France  
 Tel: +33 (0) 130 79 33 00  
 Fax: +33 (0) 134 81 03 59  
 CustomerCare.lcsb@te.com

**ASIA**

Measurement Specialties (China), Ltd.,  
 a TE Connectivity Company  
 No. 26 Langshan Road  
 Shenzhen High-Tech Park (North)  
 Nanshan District, Shenzhen 518057 China  
 Tel: +86 755 3330 5088  
 Fax: +86 755 3330 5099  
 CustomerCare.shzn@te.com

**TE.com/sensorsolutions**

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.