

MODEL 3801A ACCELEROMETER




SPECIFICATIONS

- ◆ Gas Damped, DC Response
- ◆ Hermetically Sealed
- ◆ mV Output, Silicon MEMS
- ◆ 10,000g Over-Range Protection

The Model 3801A is a mV output piezoresistive MEMS accelerometer in a rugged welded hermetic package. The accelerometer incorporates mechanical stops for over-range protection up to greater than 10,000g. The model 3801A is offered in ranges from ± 2 to ± 2000 g and is gas damped to provide a wide frequency response. The accelerometer is temperature compensated to provide a stable output over the operating environment.

dimensions

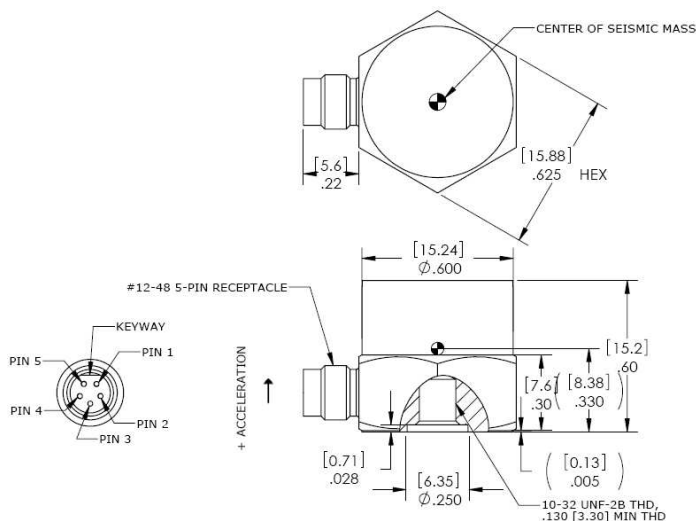


FEATURES

- ◆ ± 2 g to ± 2000 g Dynamic Range
- ◆ 10,000g Shock Protection
- ◆ Hermetically Sealed
- ◆ Gas Damping
- ◆ mV Output
- ◆ DC Response
- ◆ Stud Mounting

APPLICATIONS

- ◆ Impact Testing
- ◆ Structural Testing
- ◆ Test and Instrumentation
- ◆ Environmental Testing
- ◆ Vehicle Testing

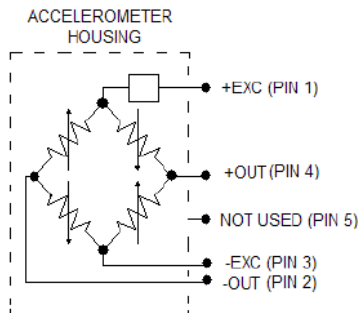

MODEL 3801A ACCELEROMETER

PERFORMANCE SPECIFICATIONS

All values are typical at +24°C, 80Hz and 10Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice.

Parameters

DYNAMIC

	±2	±10	±20	±50	±100	±200	±500	±2000	Notes
Range (g)	±2	±10	±20	±50	±100	±200	±500	±2000	
Sensitivity (mV/g)	12	6	3	1.5	0.7	0.7	0.3	0.1	@10Vdc Exc.
Frequency Response (Hz)	0-100	0-300	0-400	0-800	0-1200	0-1300	0-1800	0-4000	±5% ¹
Frequency Response (Hz)	0-200	0-400	0-500	0-1000	0-1500	0-1600	0-2300	0-5000	±1dB
Natural Frequency (Hz)	700	1000	1500	4000	6000	7000	8000	10000	
Non-Linearity (%FSO)	±1.0	±1.0	±1.0	±1.0	±1.0	±1.0	±1.0	±1.0	
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	<3	<3	<3	
Damping Ratio	0.7	0.7	0.7	0.7	0.7	0.6	0.5	0.3	
Shock Limit (g)	5000	5000	5000	10000	10000	10000	10000	10000	

ELECTRICAL

Zero Acceleration Output (mV)	±25								Differential
Excitation Voltage (Vdc)	5 to 10								
Input Resistance (kΩ)	4 to 10								
Output Resistance (kΩ)	2.4 to 4.8								
Insulation Resistance (MΩ)	>100								@100Vdc
Residual Noise (µV RMS)	10								Maximum
Ground Isolation	Isolated from Mounting Surface								

ENVIRONMENTAL

Thermal Zero Shift (%FSO/°C)	±0.04
Thermal Sensitivity Shift (%/°C)	±0.05
Operating Temperature (°C)	-55 to +125
Compensated Temperature (°C)	-20 to +85
Storage Temperature (°C)	-55 to +125
Humidity	Hermetically Sealed, IP67

PHYSICAL

Case Material	Stainless Steel
Weight (grams)	20
Mounting	#10-32 to #10-32 Mounting Stud (included)
Mounting Torque	18 lb-in (2.0 N-m)

Calibration supplied: CS-FREQ-0100 NIST Traceable Amplitude Calibration from 20Hz to ±5% Frequency Response Limit¹

Supplied accessories: AC-D02298 10-32 to 10-32 mounting stud

Optional accessories: 340A-XXX Cable Assembly, #28 AWG, -54 to +121°C (XXX designates length in inches, 5ft standard)
 343-XXX Cable Assembly, #28 AWG, -40 to +85°C (XXX designates length in inches, 5ft standard)
 121 3-Channel Precision Low Noise DC Amplifier
 140A Auto-zero Inline Amplifier

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

MODEL 3801A ACCELEROMETER

ORDERING INFO

PART NUMBERING Model Number+Range+Options

3801A-GGGG-XX

| | | Options (otherwise leave blank)
| | Range (0100 is 100g)
| Electrical Interface (A; Connector, B; Integral Cable)

Optional Dash Numbers
-01 5Vdc Calibration

Example: 3801A-0100
Model 3801A, 100g, Connector, No Options

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
Tel: 800-522-6752
Email: customercare.hmpt@te.com

EUROPE

MEAS France SAS
a TE Connectivity Company
Tel: 800-440-5100
Email: customercare.lcsb@te.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
Tel: 0400-820-6015
Email: customercare.shzn@te.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.