

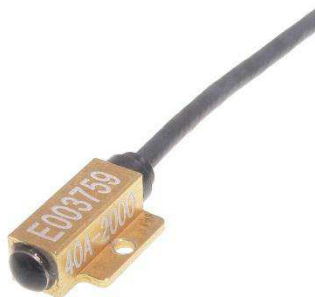
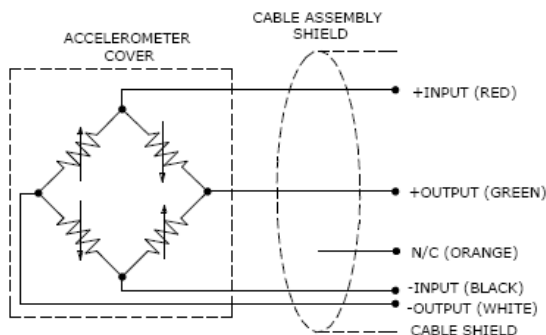


MODEL 40A ACCELEROMETER

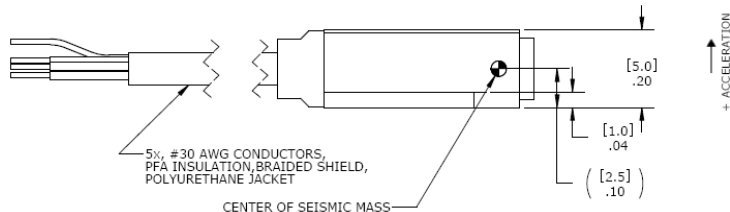

DIMENSIONS

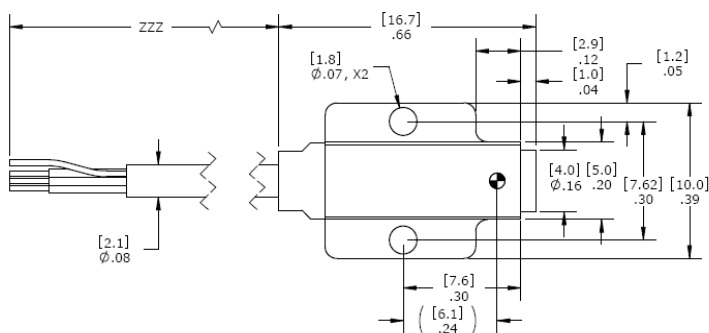

SPECIFICATIONS

- ◆ $\pm 25g$ to $\pm 2000g$ Dynamic Range
- ◆ Fluid Damped, DC Response
- ◆ Compliant to SAE J2570
- ◆ Temperature Compensated

The **Model 40A Accelerometer** is a small piezoresistive accelerometer designed to be compliant with the latest SAE J211/J2570 (AUG2009) specifications. This unit features built-in mechanical stops, anodized aluminum alloy housing and flexible cable output. The sensing element is fluid damped to extend useful frequency range and reduce the adverse effect of high frequencies ringing caused by sensor resonance.

FEATURES

- ◆ Silicon Piezoresistive Elements
- ◆ ± 25 to $\pm 2,000$ g Ranges
- ◆ 2-10 Vdc Excitation
- ◆ -20 to +80 °C Temperature Range
- ◆ Critically Damped Sensor
- ◆ Low Transverse Sensitivity
- ◆ $< \pm 20$ mV Zero Offset

APPLICATIONS

- ◆ Safety Crash Testing
- ◆ Auto
- ◆ Truck
- ◆ Recreational Vehicles
- ◆ Shock Testing

PERFORMANCE SPECIFICATIONS

All values are typical at ±24°C, 80Hz and 10Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice.

Parameters	-0025	-0100	-0250	-0500	-1000	-2000	Notes
DYNAMIC							
Range(g)	±25	±100	±250	±500	±1000	±2000	
Sensitivity (mV/g) ¹	6.0	1.5	0.60	0.30	0.15	0.075	@10Vdc excitation
Frequency Response (Hz)	0-200	0-400	0-600	0-1100	0-1500	0-2500	+2.5%/-8%
	0-350	0-675	0-1100	0-2000	0-2700	0-4500	+2.5%/-20%
Natural Frequency (Hz)	>800	>1500	>2500	>4500	>6000	>10000	
Non-Linearity (% FS)	±1	±1	±1	±1	±1	±1	
Damping Ratio	0.7	0.7	0.7	0.7	0.7	0.7	Typical
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	<3	
Shock Limit (g)	5000	10000	10000	10000	10000	10000	
ELECTRICAL							
Zero Acceleration Output (mV)	<±20						
Excitation (Vdc)	2 to 10						
Input Resistance (Ω)	2000						Typical
Output Resistance (Ω)	1000						Typical
Insulation Resistance (MΩ)	>100						@100Vdc
Ground Isolation	Isolated from mounting surface.						
ENVIRONMENTAL							
Thermal Zero Shift (%FSO/°C)	±0.05						From -10 to +50°C
Thermal Sensitivity Shift (%/°C)	±0.1						From -10 to +50°C
Operating Temperature (°C)	-20 to +80						
Storage Temperature (°C)	-20 to +80						
Humidity	Epoxy Sealed, IP61						
PHYSICAL							
Case Material / Cover Material	Anodized Aluminum						
Cable (Integral 30 Foot Cable)	5x #30 AWG Conductors, PFA Insulated, Braided Shield, PU Jacket						
Weight (grams)	<5						
Mounting	2x 0-80 x 3/16 socket head cap screws						
Mounting Torque	3 lb-in (0.7 N-m)						
OPTION							
Model 40L-GGGG-ZZZ	With transverse sensing direction (parallel to mounting surface)						


¹ Output is ratiometric to excitation voltage. Tolerance is +50%/-30%.

Calibration supplied: CS-FREQ-0100 NIST Traceable Amplitude Calibration from 20Hz to Upper Frequency Limit

Supplied accessories: AC-A03923 2x #0-80 (3/16" length) Socket Head Cap Screw, 2x #0 Washer, 1x Allen Key

Optional accessories: MTG-E2 Triaxial Mounting Block
 121 3-Channel Precision Low Noise DC Amplifier
 140A Auto-zero Inline Amplifier

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

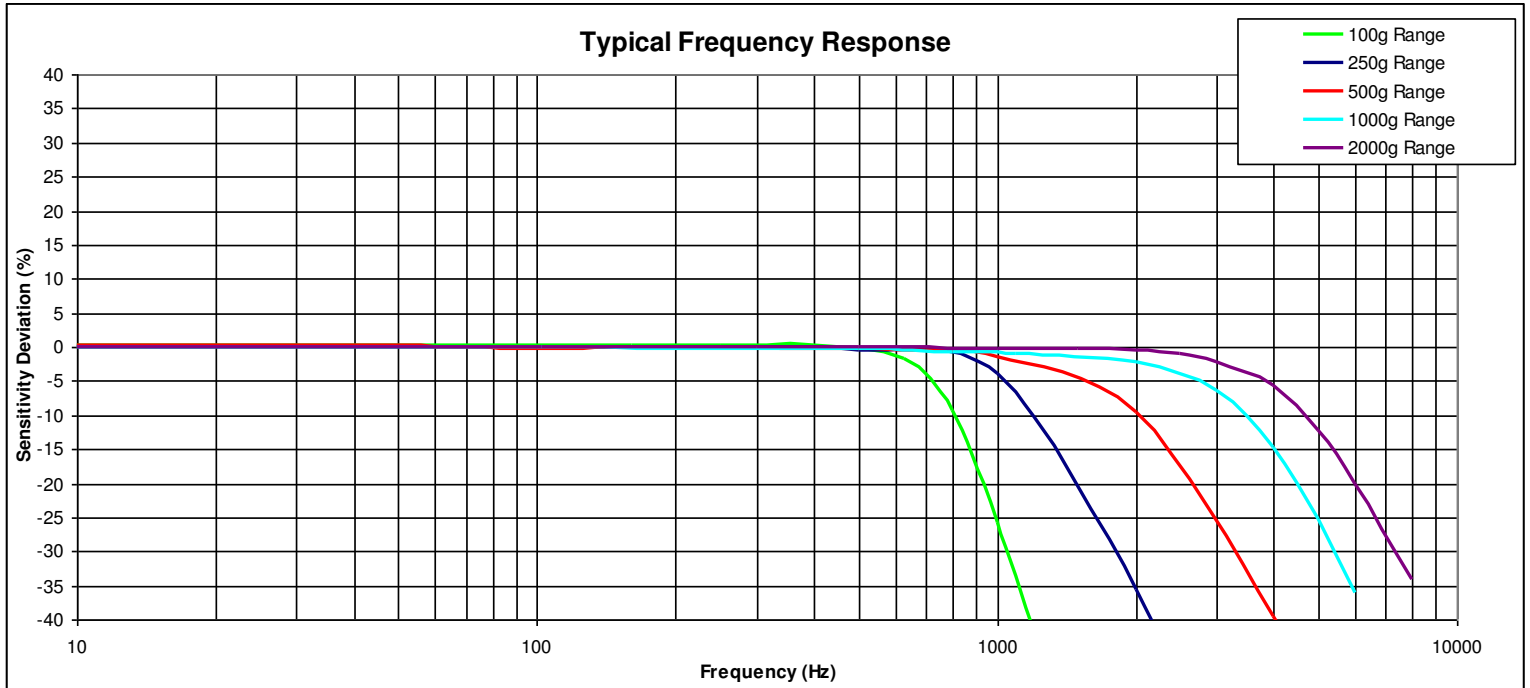

ORDERING INFORMATION

PART NUMBERING Model Number+Range +Cable Length+Options

40A-GGGG-ZZZT-XXX

- | | | | Options (otherwise leave blank)
- | | | | 1% Transverse Sensitivity when "T" is present
- | | | | Cable (360 is 360 inches)
- | | | | Range (0100 is 100 g)

- Optional Dash Numbers
- 001 5Vdc Calibration
 - 002 2Vdc Calibration

Example: 40A-2000-360
Model 40A, 2000g, 360" (30ft) Cable, No Options

Option: Model 40L-GGGG-ZZZ with transverse sensing direction (parallel to mounting surface)

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
Tel: 800-522-6752
Email: customercare.hmp@te.com

EUROPE

MEAS France SAS
a TE Connectivity Company
Tel: 800-440-5100
Email: customercare.lcsb@te.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
Tel: 0400-820-6015
Email: customercare.shzn@te.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.